

## A Gesture Based Interface for Robot Interaction and Control

**S. Selvakumar**

Assistant Professor

Department of Electronics and Communication Engineering

Sri Chandrasekharendra Saraswathi Viswa Mahavidyalaya, Kanchipuram, Tamil Nadu, India

Email: [sell84@gmail.com](mailto:sell84@gmail.com)

DOI: <http://doi.org/10.5281/zenodo.2222243>

### Abstract

Motion acknowledgment, it is an innovation which is gone for translating human motions with the assistance of numerical calculations. When all is said in done, buyer electronic gear utilize remote control for UIs. By supplanting the remote control framework with hand signals is an imaginative UI that settle the entanglements in the utilization of remote control for residential supplies. The proposed model manages utilizing hand motion to play out the essential controls in robot movement controlling. This kind of UI utilizing signal has focal points of straightforward entry and human machine collaboration. Signals are a characteristic type of correspondence and are anything but difficult to learn. Anyway utilizing signals to control robot movement requires motion acknowledgment calculation and sufficient equipment identifying with it.

**Keywords:** Gestures, Gesture Control, Gesture recognition, Laptop control, Lab VIEW.

### INTRODUCTION

Lab VIEW is programming which gives graphical programming condition utilized by a huge number of architects and researchers to create complex estimation, test, and control frameworks. The Sixth Sense gadget has a colossal number of uses; it is less demanding for us to be mechanically wakeful constantly and to associate with the world by means of the most up to date creations. The Sixth Sense model executes a few applications that exhibit the value, suitability and adaptability of the framework [1]. The intuition model is included hardware like a

camera and programming to perform picture handling. Acknowledgment is made utilizing PC vision system. The product program, written in Lab VIEW, forms this video stream information and translates the development of the hand [2]. For people, vision is critical to distinguish, arrange and perceive things. The equivalent applies to robots too. These kinds of machines are called as Vision Controlled Machines (VCM)[5]. Some normal uses of VCM are Robotics, Object acknowledgment and correlation and other modern applications.



**Fig: 1.** the block diagram of a Vision Controlled Machine


The picture procurement gadget utilized here is the camera. The choice of camera depends on the application, cost and processor utilized. "An ease visual movement information glove as an info

gadget to decipher human hand motions" (2010). In this paper the visual movement information glove was produced and results for signal acknowledgment were gotten. A solitary channel video

framework was adjusted used to diminish the expense and 3D hand movement estimation calculation was planned. In spite of the fact that they give exact control, wearing extra gadgets made the clients uneasy [3]. "Free-hand signals for music playback: determining motions with a client focused process" (2010). The procedure proposed to determine and configuration signal interface control music playback. The specialized restrictions influenced execution of motion acknowledgment procedures [4]. "The plan and assessment of a flick signal for back and forward in internet browsers" (2003). This paper portrayed the assessment of a signal framework for exploring the internet browser. Time taken to finish the undertaking was lessened by 18%. Anyway preparing was required, to make the motion in an exact way [6]. "GWindows: powerful stereo vision for signal based control of windows" (2003). For dynamic motion acknowledgment, numerous works have utilized profundity data dependent on stereo vision or 3D camera. Be that as it may, stereo vision does not give picture goals adequate to hand shape examination because of the absence of surface regarding the matter [7].

### SIXTH SENSE TECHNOLOGY

This sixth sense technology furnishes us with the opportunity of collaborating with the advanced world utilizing hand signals. This innovation has a wide application in the field of computerized reasoning. This system can help in combination of robots that will have the capacity to cooperate with people [8]. The Sixth Sense model executes a few applications that exhibit the convenience, suitability and adaptability of the framework, which is involved gear like pocket projector, a mirror, versatile parts, shading markers and a camera. The projector ventures visual pictures on a surface. This surface can be divider, table or even your hand. Along these lines, the whole world is accessible on your screen now [9]. At the point when client moves their hands to shape distinctive signals with shading markers on the fingertips, the camera catches these developments. Both the projector and the camera are associated with the portable registering gadget in the client's pocket [10]. Acknowledgment is made utilizing PC vision procedure. These markers go about as visual following fiducially. The product program forms this video stream information and translates the developments into motions.

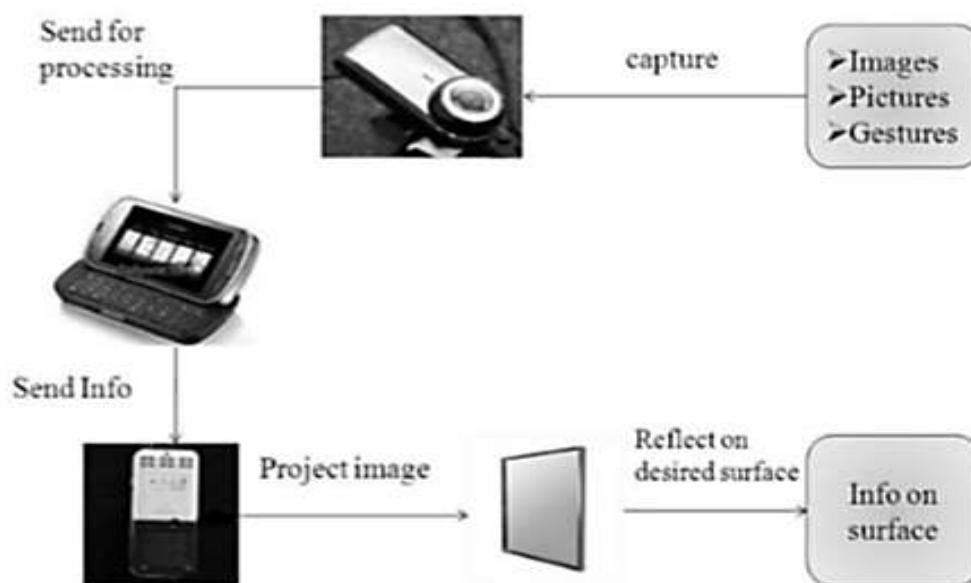

**Fig: 2.** Working of Sixth Sense Technology

The motions are not quite the same as each other and are doled out a few directions. These motions can go about as contribution to application which is anticipated by the projector. The mirror mirrors the picture shaped by the projector to front. The whole equipment is created as a pendent. It works fundamentally the same as like a touch screen telephone with whole world as the screen.

### **GESTURE RECOGNITION**

It is an innovation which is gone for translating human motions with the assistance of numerical calculations. Motion acknowledgment strategy empowers people to communicate with PCs in a more straightforward manner without utilizing any outer interfacing gadgets. An interface which exclusively relies upon the motions requires exact hand present following.

In the early forms of motion acknowledgement process extraordinary sort of hand gloves which give data about hand position introduction and motion of the fingers. Neural system approaches or factual layouts are the regularly utilized strategies utilized for the acknowledgment purposes. This method has a high precision for the most part indicating exactness of over 95%. Time subordinate neural system can likewise be utilized for ongoing acknowledgment of the motions. Interface with PCs utilizing motions of the human body, regularly hand developments. In signal acknowledgment innovation, a camera peruses the developments of the human body and conveys the information to a PC that utilizes the motions as contribution to control gadgets or applications. For instance, a man applauding together before a camera can deliver the sound of cymbals being smashed together when the motion is nourished through a PC.


### **SOFTWARE DESCRIPTION**

LabVIEW(short for Laboratory Virtual Instrumentation Engineering Workbench)

is a framework structure stage and improvement condition for a Visual Programming Language from National Instruments. Initially discharged for the Apple Macintosh in 1986, LabVIEW is generally utilized for information securing, instrument control, and mechanical robotization on an assortment of stages including Microsoft Windows, different variants of UNIX, Linux, and Mac OS X. LabVIEW is a graphical programming stage that enables specialists to scale from configuration to test and from little to huge frameworks. It offers phenomenal coordination with existing inheritance programming, IP, and equipment while gaining by the most recent registering innovations. LabVIEW gives devices to take care of today's issues—and the limit with respect to future advancement—quicker and all the more adequately. Visual Basic, C++, JAVA, and most other codes are content based programming dialects. LabVIEW, then again, is a stage for virtual programming. This makes it simple to make VIs(Virtual Instruments). LabVIEW programming is perfect for any estimation or control framework, and the core of the NI plan stage. Incorporating every one of the apparatuses that specialists and researchers need to construct an extensive variety of utilizations in drastically less time, LabVIEW is an improvement situation for critical thinking, quickened profitability, and persistent development.

### **PROJECT DESCRIPTION**

In general, robot motion solely involves the utilization of software programming for its control. Not only software programming but also geatures are used to control the motion of the robot. Hand gestures is an innovative user interface that resolves the complications in the complete dependence of programmeon motion control.The project deals with using hand gesture to perform the basic robot motion control along with Lab VIEW software.

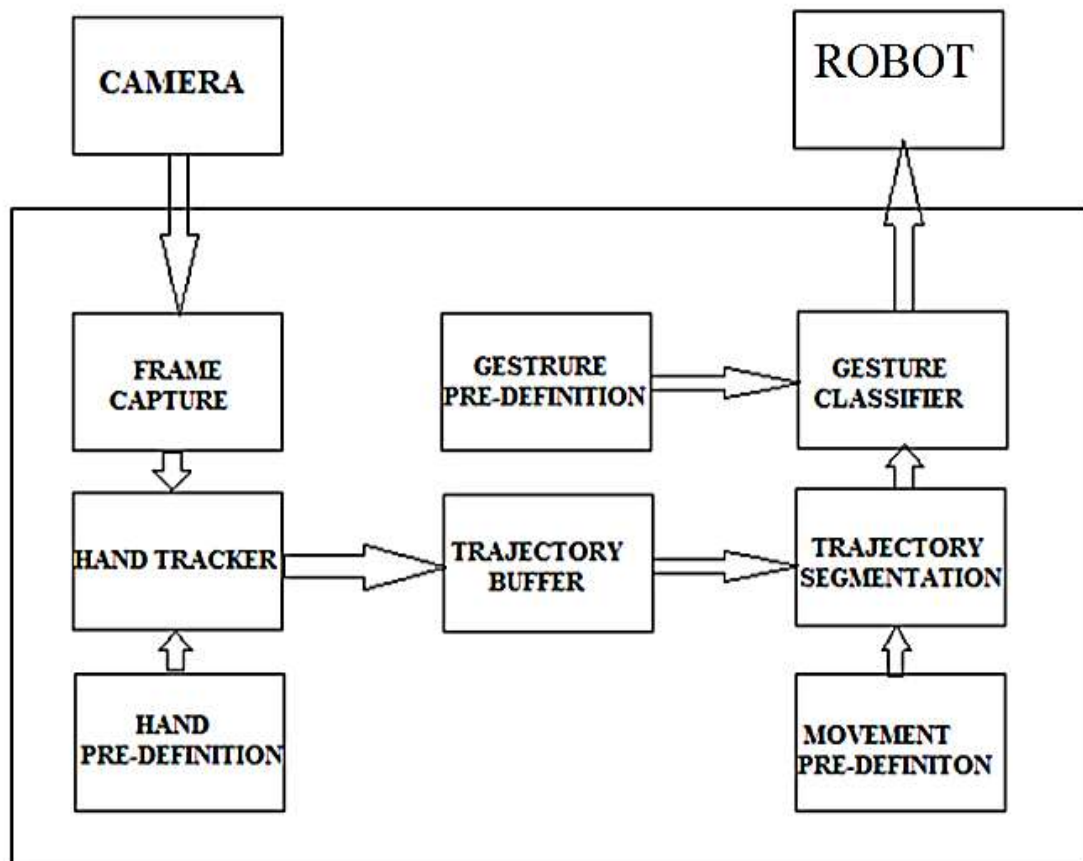

*Fig: 3. Block Diagram of Proposed model*

This type of user interface using gesture has advantages of ease of access and human machine interaction. Motions are a characteristic type of correspondence and are anything but difficult to learn. Anyway utilizing signals to control electronic gear requires motion acknowledgment calculation and satisfactory equipment identifying with it.

### EXPLANATION

There are three stages engaged with the task, to be specific, Pattern coordinating, Hand following, Control utilizing signals. The three stages are clarified quickly.


- **Pattern matching:** Initial, a picture is caught, to be utilized as a format for example coordinating. We spare the layout picture in .png organize for simple reference. We make the layout picture by choosing the area or protest

the clients are keen on to use as a following reference.

- **Hand tracking:** After the layout picture is made, the program utilizes it as a source of perspective to look inside the constantly refreshed picture being caught by the camera. By contrasting the caught picture with the spared layout, the program can consistently follow the hand.
- **Control using gestures:** Utilizing these two capacities, we can control hardware. In this undertaking, controlling the robot movement.

### SIMULATION AND RESULTS

Depending on the type of gestures the motion of the robot depends. The gestures are pre loaded in the computer in the form of mathematical algorithm.

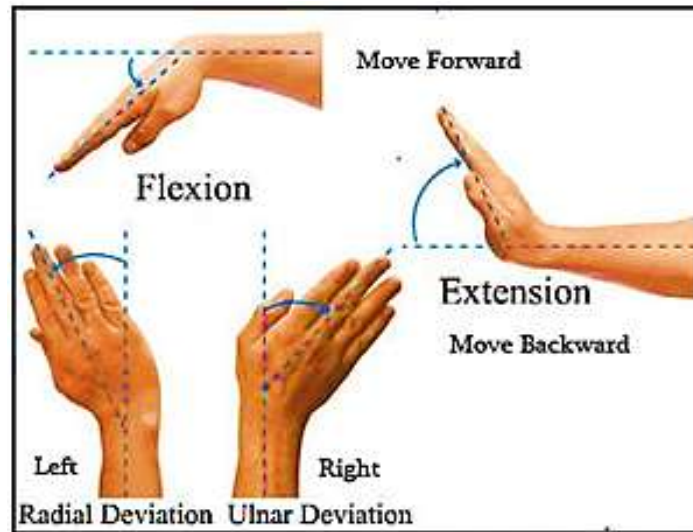

*Fig: 4. Gesture Movement Diagram*

When the gesture is drawn or shown, the camera captures the image and converts it into mathematical algorithm.



*Fig: 5. Robo Car with Camera*

Depending upon the type of motion combined with the type of gesture, the robot starts moving and the motion can be controlled with the gestures.



*Fig: 6. Motion controlled with gestures.*



## CONCLUSION

The proposed model involves static user defined gestures to control robot motion. The software used for performing the control is LabVIEW. The project is started and in mid-completion.

## REFERENCES

1. N. Henze, A. Locken, S. Boll, T. Hesselmann, and M. Pielot, (2010), "Free-hand gestures for music playback: deriving gestures with a user-centered process", Proceedings of the 9th International Conference on Mobile and Ubiquitous Multimedia, no. 16.
2. Y. M. Han, (2010) "A low-cost visual motion data glove as an input device to interpret human hand gestures", IEEE Trans. Consumer Electronics, Vol.56, no. 2, pp. 501-509.
3. A. Wilson, and N. Oliver, (2003) "GWindows: robust stereo vision for gesture based control of windows", ICMI 03, pp. 211-218.
4. M. Moyle, and A. Cockburn, (2003) "The design and evaluation of a flick gesture for "back" and forward" in web browsers", Proceedings of the 4th Australasian User Interface Conference on User Interfaces, Vol. 18, pp. 39-46.
5. S. Selvakumar, Dr.S.Ravi, Adaptive Modulation IN Reconfigurable Platform Journal of Theoretical and Applied Information Technology. Vol 68, PP 108-114, Oct 2014.
6. S. Selvakumar, Dr.S.Ravi, DPSK and QAM Modulation Detection analyzed with BER Estimation IEEE International Conference on Current Trends in Engineering and Technology, July 2014.
7. Navaneethan.C, "Clustering Wireless Nodes Based On Adaptive Modulation With Customized Kernel," J. Theor. Appl. Inf. Technol., Vol. 63, No. 3, Pp. 825–835, 2014.
8. V. Brik, S. Banerjee, M. Gruteser, and S. Oh., Wireless device identification with radiometric signatures, in MobiCom '08: Proceedings of the 14th ACM International Conference on Mobile Computing and Networking, ACM, pp. 116-127, New York, USA, 2008.
9. Z. Li, W. Xu, R. Miller and W. Trappe, Securing wireless systems via lower layer enforcements, In WiSe '06: Proceedings of the 5th ACM Workshop on Wireless Security, pp. 33-42, ACM Press, 2006.
10. Maryam Soltan, Inkwon Hwang, Massoud Pedram, Modulation-Aware Energy Balancing in Hierarchical Wireless Sensor Networks, IEEE Transaction, 2008.

**Cite this article as:** S. Selvakumar. (2018). A Gesture Based Interface for Robot Interaction and Control. Journal of Signal Processing, 4(3), 33–38. <http://doi.org/10.5281/zenodo.2222243>