

# Performance Analysis of Congestion Control Techniques ADTCP and Improved ADTCP for Improving TCP Performance over Ad-hoc Networks

**Sreenivasa BC<sup>1\*</sup>, GC Bhanu Prakash<sup>2</sup>**

<sup>1</sup>Associate Professor, Department of Computer Science and Engineering, SAHE University, Tumkur, Karnataka, India

<sup>2</sup>Professor, Department of Computer Science and Engineering, Sir M. Visvesvaraya Institute of Technology, Bangalore, Karnataka, India

**Email:** \*srinivasbc@rediffmail.com

**DOI:** <http://doi.org/10.5281/zenodo.3358384>

## Abstract

*Recognizing the event of clog in a mobile ad-hoc network (MANET) is a noteworthy undertaking. The inbuilt clog control systems of existing transmission control protocol (TCP) intended for wired systems don't deal with the interesting properties of shared remote multi-bounce interface. There are a few methodologies proposed for identifying and defeating the clog in the portable specially appointed system. The sender conduct is modified fittingly. The proposed strategy is likewise good with standard TCP.*

**Keywords:** Ad-hoc, Congestion, TCP

## INTRODUCTION

Versatile Ad-hoc Networks (MANET) don't have a fixed infrastructure. MANETs utilizes standard IEEE 802.11 MAC. In specially appointed system every hub (Mobile gadget) goes about as a switch, which aides in for warding bundles from a source to goal [1, 2]. NETs are appropriate in circumstances where fixed framework is inaccessible, for example, Military war fields, calamity help, sensor systems, Wireless work arrange and so on. TCP clog control is particularly reasonable for Internet, while for MANETs a similar TCP isn't appropriate because of a portion of the particular properties like hub portability and shared remote multi-bounce channel. A moderate conveyance and parcel misfortune happens because of hub versatility and temperamental shared medium. The postponement in the parcel conveyance or bundle misfortunes is because of course change ought not to be misread as blockage.

In internet, when blockage happens, it is ordinarily focused on a solitary switch,

though, because of the common mechanism of the MANET clog won't over-burden the portable hubs however affects the whole inclusion zone. The adjustments in the steering of the bundle may prompt parcel misfortunes which isn't caused because of blockage in the system ought not to be mistakenly misjudged as TCP clog. This can prompt wrong responses of TCP blockage control. Besides, observing parcel misfortunes is a lot harder, due to their differing transmission time and round outing time [3, 4].

Numerous gadgets in specially appointed system, sharing a typical asset (i.e., media) go after connection data transfer capacity, which prompts system over-burden. At the point when more information bundle lands at the switch, the un-adjusted parcel gets dropped. These dropped bundles would have devoured the majority of the system assets. The lost bundles must be retransmitted, which thus prompts siphoning of more parcels into the system, bringing about de-degree of system

throughput and prompting clog. To keep away from clog and system over-burden every sender needs to modify its information sending rate and window size.

A great deal of research is being completed in the region of blockage control, steering of bundles, adjustment of standard TCP convention, planning of new directing convention, and so on in MANET [5-8].

In OSI reference model, blockage control is the obligation of the vehicle layer. The mix of blockage control and unwavering quality highlights in TCP, permits clog control the board without the data about clog status of the system. A legitimate system is to be embraced to keep away from clog breakdown of the MANET, which leads to the alteration of TCP blockage component [1]. The altered TCP ought to give blunder and stream control. Stream control ensures that the sender does not flood out the collector by sending information at a rate quicker than the beneficiary can process. It should likewise give dependable start to finish transmission of information over MANETs. The changed TCP ought to be fit for giving full-duplex, solid and byte-stream administrations to the application programs [9-12].

### **Related Work**

A reasonable blockage control system for MANET is considered as a significant issue. A portion of the blockage related issues like throughput debasement and stream decency are started from Media Access Control (MAC), directing and transport layer as talked about in [2-5]. A few papers have tended to and given reasonable answers for defeat these issues.

A remote connection is inclined to arbitrary parcel misfortunes not at all like wired system. These misfortunes influence the vehicle conventions execution, in the

event that they are wrongly deciphered as clog incited by dropped parcels. The connection layer gives single bounce dependability in 802.11 MAC conventions. The parcels are dropped by connection layer, simply after greatest transmission endeavors. This happens when either a connection is lost or because of bundle impact. This segment mostly manages various methodologies for clog control in remote specially appointed system.

### **Cross-layer congestion control (C<sup>3</sup>TCP)**

In these component two system measurements, data transmission and postponement are estimated among source and goal by cumulating middle of the road bounce estimations. This plan is proposed by Kliazovich et al. [6] and is like Rate-Based Congestion Control (RBCC) proposed by Zhai et al. [7]. In this strategy an input field where the gathered data at middle of the road hub is put away and added to the connection layer header. At the point when ACK is produced at goal hub, the criticism data of the information parcel is transmitted to the sender. This data is utilized to change recipient window field in ACK. It is likewise used to adjust the windows size of the sender, which is situated above TCP stack as an extra module. All C<sup>3</sup>TCP rationale is a piece of extra convention module without irritating unique TCP.

### **TCP with Adaptive Pacing (TCP-AP)**

ElRakabawy et al. [1] proposed a system TCP-AP. This strategy receives a start to finish approach for blockage control dissimilar to C<sup>3</sup>TCP and RBCC. TCP-AP is a mix of both window and rate based methodology. TCP is added with rate based instrument to keep away from huge burst of bundles.

In this method, the creator proposes 4 jumps spread postponement as a measurement, estimated utilizing RTT of

the parcels. This is accepted as any obstruction on the off chance that it occurs inside 4 jumps. This spread postponement is the time slipped by between the transmissions of bundle by source hub to the getting hub 4 bounces downstream. So as to appraise least time slipped by between progressive parcels, an extra metric, i.e., the coefficient of variety of RTT tests is utilized.

### **TCP with Restricted Congestion Window Enlargement (TCP/RCWE)**

Gunes and Vlahovic [8] proposed a procedure dependent on Explicit Link Failure Notification (ELFN) system. In this procedure the estimation of Retransmission Time Out (RTO) is watched haphazardly. The blockage window size is expanded if the RTO worth stays steady or diminishes. On the off chance that the RTO worth expands the blockage window size is unaltered. The creator has directed NS-2 reenactment utilizing RCWE and announced lower bundle misfortunes and higher throughput because of littler clog window. The genuine performance improvement due to ELFN is proved unable, as reproductions depend on standard TCP without ELFN.

### **Ad-hoc TCP (ADTCP)**

ADTCP proposed by Fu et al. [9] utilizes two measurements, between bundle defer distinction and momentary throughput to distinguish arrange congestion. The time slipped by between two progressive parcels and the throughputs in certain time interim in the quick past are characterized as between bundle postpone contrast and transient throughput individually. At the point when blockage happens, between parcel delay differences increases, momentary throughput diminishes. To distinguish between the channel mistake and course change, this procedure uses out of request parcel landing and bundle misfortune proportion. In ADTCP, the gathered data at the collector is sent as a criticism to the sender.

### **IMPROVED-ADTCP**

TCP has been overwhelmingly utilized as vehicle convention in the wired Internet to convey information; thus, various Internet applications have been created to keep running over TCP. Be that as it may, as clarified prior, TCP don't work agreeably in specially appointed systems.

### **Concept**

TCP in a specially appointed system ought to be fit for dealing with disengagement and reconnection, bundle out of request conveyance if there should be an occurrence of course change and blunders because of hub versatility not withstanding blockage control.

In our strategy, we have adjusted start to finish estimation without considering unequivocal system warning component. The estimations did at the beneficiary for each time interim  $\alpha$ , are utilized to process the status of the system to recognize clog related parameters. These parameters are cautiously observed to start fitting blockage control activity for next cycle [13].

In MANET, the bogus blockage recognitions and notices happen because of commotion related with estimations made at end has. Round-Trip Time (RTT) or bundle between entry times isn't the perfect measurement for identification of clog, as the deliberate information is loud [14]. The likelihood of false blockage recognition is more in uncongested MANET, when just a solitary metric estimation is utilized. This prompts low TCP throughput. In this paper, we have proposed 4 measurements for recognizing clog. These measurements empower us to lessen commotion in the deliberate information, in this way decreasing likelihood of false clog ID.

In IMPROVED-ADTCP, the following metrics are devised to detect congestion:

- IDD (Inter Delay Difference)
- STT (Short Term Throughput)
- POR (Packet Out of delivery Rate)

In blocked express all these four measurements show exceptional qualities. The estimations made during the uncongested state for the most part rely upon winning system conditions and autonomous of clamor estimation. Utilization of every one of these measurements decreases the bogus location of clog in the system.

### Computation of End-to-End metrics

IMPROVED-ADTCP sender utilizes the Round-Trip Time (RTT) to compute the retransmission break. In specially appointed systems bundle postponement isn't just because of line length, yet in addition relies upon different elements like arbitrary parcel misfortune, changes in the course, MAC layer dispute, and so on. The procedure of calculation of every measurement in detail pursues [15, 16].

### Inter-packet Delay Difference (IDD)

IDD demonstrates the clog level along the way for each time interim. The collector figures defer utilizing Eq.1 for every parcel got. The normal IDD is processed for each time interim  $\alpha$  ( $\approx 0.9s$ ) to determine status of system.

$$IDD_i = (A_{i+1} - A_i) - (S_{i+1} - S_i) \quad (1)$$

$$IDD_{[T, T+\alpha]} = \text{avg}(IDD_{(i)}) \quad (2)$$

the time interval T to T+ $\alpha$

Where,

IDD: Inter Packet Delay Difference

$A_{i+1}$  : Arrival time of packet i+1

$A_i$  : Arrival time of packet i

$S_{i+1}$  : Sending time of packet i+1

$S_i$  : Sending time of packet i

### Algorithm for Calculation of IDD

Compute IDD (st, ed)//start and end packet number

repeat // i is the packet number

if(snd<sub>[i]</sub> and rcvd<sub>[i]</sub> and rcvd<sub>[i+1]</sub> and

snd<sub>[i+1]</sub>)  
idd+= (rcvd<sub>[i+1]</sub>-rcvd<sub>[i]</sub>)-(snd<sub>[i+1]</sub>-snd<sub>[i]</sub>)  
until (i<ed)  
idd=idd/(ed-st+1)

In the calculation, the capacity "Compute IDD" figures IDD for every interim. The contentions to this capacity are starting and end parcels for a specific interim. The information structures rcvd[] and snd[] contain the occasions at which every bundle is gotten and sent individually. These clusters are listed by the succession number of the bundles.

### Short-Term Throughput

The STT computation is independent of out-of-order packet delivery. The frequent changes in path selection do not influence STT calculation. The equation for computation of short-term throughput is as follows:

$$STT_{(i)} = N_p(T_i) / T_i \quad (3)$$

$$STT_{[T, T+\alpha]} = \text{avg}(STT_{(i)}) \quad (4)$$

for each time interval T to T+ $\alpha$

$N_p(T_i)$ : Total number of IMPROVED-ADTCP packets received in the time interval  $T_i$ .

$STT_{[T, T+\alpha]}$  is the average Short-Term Throughput in the time interval  $[T, T+\alpha]$  where  $\alpha$  is 0.9 sec.

### Packet Out-of-order delivery Ratio (POR):

On the off chance that the contrast between grouping quantities of a parcel got and that of past bundle is  $> 1$  then current parcel is excluded as of-request in a solitary bounce remote system. If there should be an occurrence of course change in multi-jump remote system a parcel may take an alternate way prompting out-of-request conveyance. This case isn't considered for POR calculation. The condition for calculation of POR is as per the following:

$$POR_{(i)} = N_{po}(T_i) / N_p(T_i) \quad (5)$$

$$POR_{[T, T+\alpha]} = \text{avg}(POR_{(i)}) \quad (6)$$

for each time interval T to T+ $\alpha$

Where,

$N_{po}(T_i)$  Total number of out-of-order packets during time interval  $T_i$ .

$N_p(T_i)$  Total number of packets received in the time interval  $T_i$ .

$POR_{[T,T+\alpha]}$  is the average Packet Out-of-order delivery Ratio in the time interval  $[T,T+\alpha]$  where  $\alpha$  is 0.9 sec.

### Performance Evaluation and Results Analysis

We have implemented IMPROVED-ADTCP and ADTCP technique using Network Simulator NS-2 Version 2.33.

#### Simulation Parameters


The system comprises of 5 hubs in a 670m x 670m square field. The MAC layer is designed to IEEE 802.11. Interface line at MAC layer is set to default number of bundles. The ostensible piece rate is 2 Mbps and transmission range is 250 m. The Two Ray Ground model is utilized with most extreme hub speed of 4m/s. DSR is utilized as a directing convention. The reproduction time is 150 seconds. Consistent Bit Rate (CBR) traffic is presented at a pace of 1Mbps somewhere

in the range of node (0) and node (3) and at a pace of 0.75Mbps somewhere in the range of node(3) and node(4) with parcel size of 1500bytes. FTP traffic is presented between hub (1) and hub (2) with default parcel size and IMPROVED-ADTCP as TCP operator.

#### Simulation Result and Analysis

The outcomes were gathered as normal qualities more than 167 Iterations in the time interim between 100 to 150 seconds. We contrasted the presentation of IMPROVED-ADTCP and ADTCP for the various measurements. In ADTCP CWL is set to steady esteem, whereas, in IMPROVED-ADTCP CWL is fluctuated dependent on the figured measurements.

Fig. 1 demonstrates the correlation dependent on Average Inter Arrival Delay. The diagram unmistakably shows that IMPROVED-ADTCP system conveys the parcels with less deferral when contrasted with ADTCP procedure.

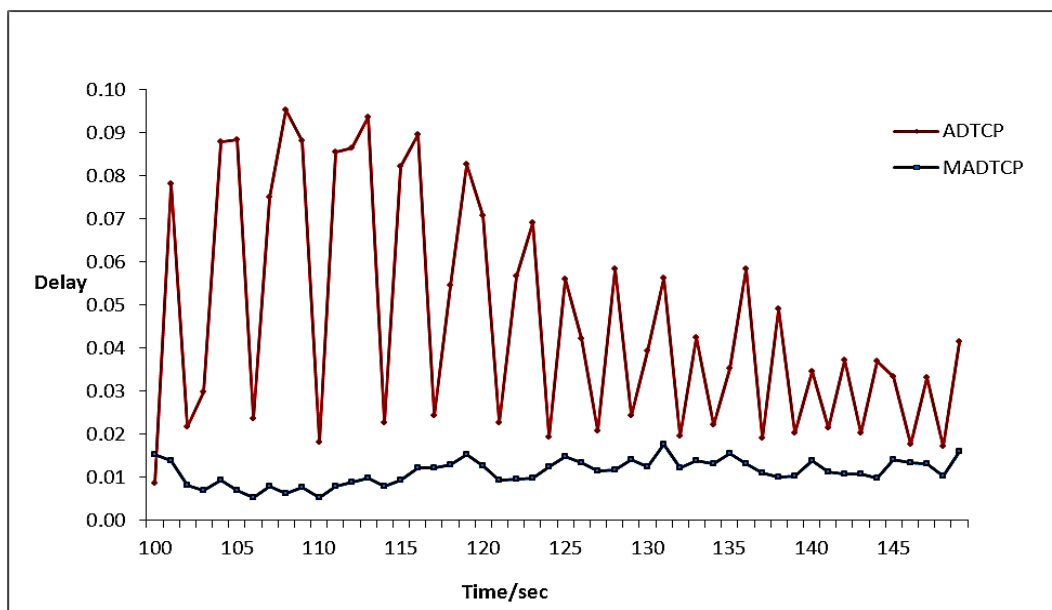


**Figure 1:** Comparison of average inter arrival delay between IMPROVED-ADTCP and ADTCP.



Fig. 2 demonstrates the correlation dependent on Average Inter Delay Difference. The chart plainly demonstrates that average inter delay


difference between parcels is less in IMPROVED-ADTCP system when contrasted with ADTCP strategy.

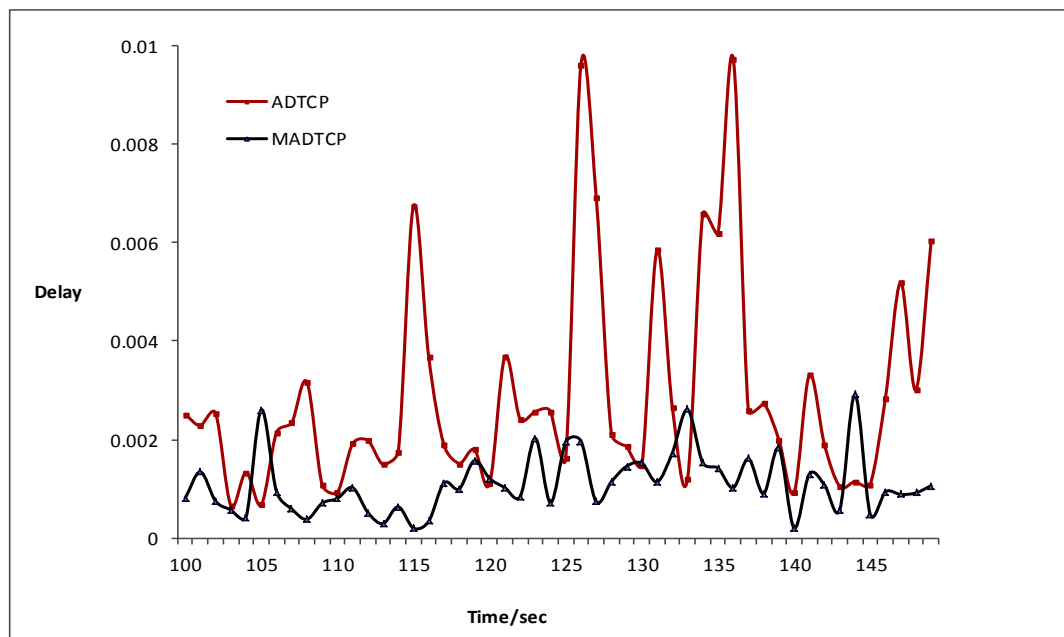

**Figure 2:** Comparison of average inter delay difference between IMPROVED-ADTCP and ADTCP.

Fig. 3 demonstrates the examination dependent on packet out of order rate. The quantity of out of request bundles is


more in ADTCP procedure when contrasted with IMPROVED-ADTCP strategy.

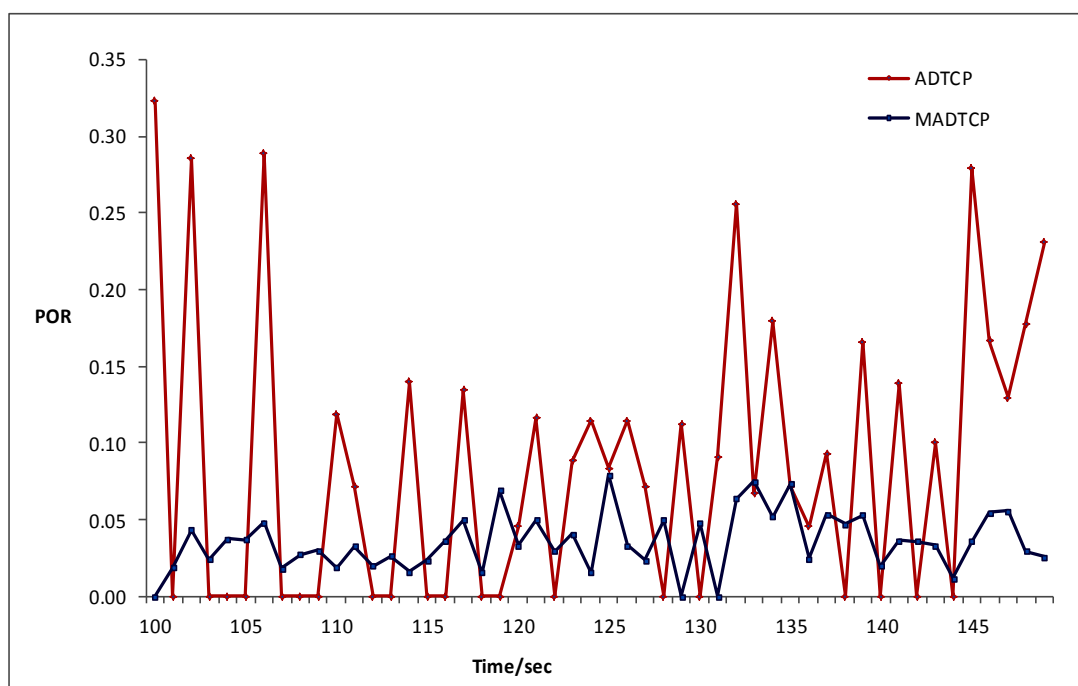

**Figure 3:** Comparison of packet out of order rate between IMPROVED-ADTCP and ADTCP.

Fig. 4 demonstrates the examination dependent on short term throughput metric.

The chart obviously shows that IMPROVED-ADTCP procedure beats ADTCP strategy.

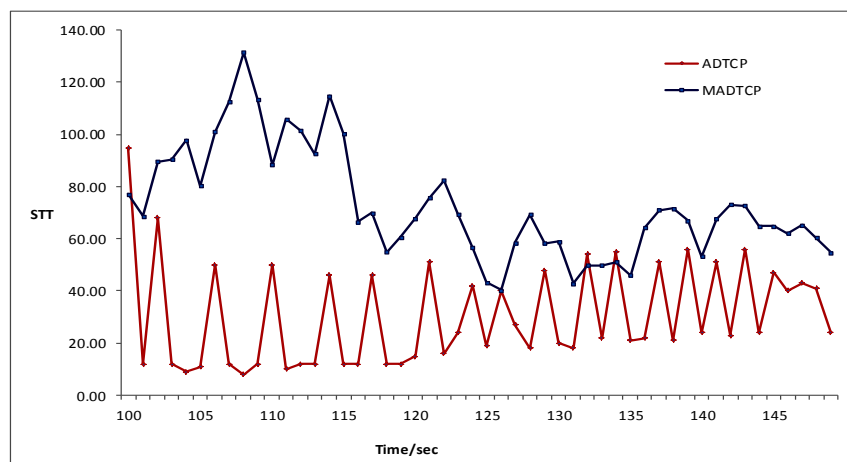

**Figure 4:** Comparison of short term throughput between IMPROVED-ADTCP and ADTCP.

## CONCLUSION

Portable Ad-hoc Networks (MANETs) have been a region of enormous intrigue and dynamic research in the course of recent years. In MANET it is extremely hard to appropriately discover a portion of the qualities, for example, channel mistake, misfortune rate, course change, blockage recognition and so forth, as the estimation information is uproarious. These confinements helped us in building up a method which tends to those issues. From the test results it very well may be effectively inferred that IMPROVED-ADTCP beats ADTCP.

Existing TCP intended for wired system ordinarily depend on ELFN for distinguishing clog. In our methodology we have adjusted start to finish estimation for clog discovery utilizing four measurements as examined in area 3.2. This helps IMPROVED-ADTCP capacity well along these lines expanding proficiency.

## ACKNOWLEDGEMENT

The author acknowledges SAHE University, Tumkur, for the encouragement and permission to publish this paper based on the research work carried out by the author towards his Ph.D. work.

The author thanks the principal Sir Mvit, Dr. V R Manjunatha for constant encouragement and also thanks Dr. G C Bhanuprakash, Head of Department Computer Science Engineering for his invaluable guidance and suggestions from time to time.

## REFERENCES

1. SM ElRakabawy, A Klemm, C Lindemann (May 2005), "TCP with Adaptive Pacing for Multihop Wireless Networks", *In MobiHoc '05: Proceedings of the 6th ACM International Symposium on Mobile Ad Hoc Networking and Computing*, pp. 288–299.
2. K Chen, Y Xue, K Nahrstedt, "On setting TCP's congestion window limit in mobile Ad Hoc Networks", *In ICC '03: Proceedings of the IEEE International Conference on Communications*, Anchorage, Alaska, May 2003.
3. V Raghu Nathan, PR Kumar (Oct. 2005), "A counterexample in congestion control of wireless networks", *In MSWiM '05: Proceedings of the 8th ACM International Symposium on Modeling, Analysis and Simulation of Wireless and Mobile Systems*, pp. 290–297. DOI: <http://doi.acm.org/10.1145/1089444.10>

- 89496.
4. K Tang, M Gerla (Oct. 1999), "Fair sharing of MAC under TCP in wireless Ad Hoc networks", *In MMT '99: Proceedings of the Workshop on Multi-access, Mobility and Tele-traffic for Wireless Communications*.
5. H Zhai, X Chen, Y Fang (Oct. 2004), "Alleviating intra-flow and inter-flow contentions for reliable service in mobile ad hoc networks", *In MILCOM '04: Proceedings of the IEEE Military Communications Conference*, Volume 3, pp. 1640–1646. DOI: 10.1109 / MILCOM. 2004 1495184.
6. D Kliazovich, F Granelli (Nov. 2006), "Cross-layer congestion control in ad hoc wireless networks", *Ad Hoc Networks*, Volume 4, Issue 6, pp. 687–708.
7. H Zhai, X Chen, Y Fang (Mar. 2005), "Rate-Based Transport Control for Mobile Ad Hoc Networks", *In WCNC '05: Proceedings of the IEEE Wireless Communications and Networking Conference*, Volume 4, pp. 2264–2269.
8. M Grünes, D Vlahovic (2002), "The performance of the TCP/RCWE enhancement for Ad-Hoc Networks", *In ISCC '02: Proceedings of the 7th IEEE International Symposium on Computers and Communication*, pp. 43–48.
9. Z Fu, B Greenstein, X Meng, S Lu (Nov. 2002), "Design and Implementation of a TCP-Friendly Transport Protocol for Ad Hoc Wireless Networks", *In ICNP '02: Proceedings of the 10th IEEE International Conference on Network Protocols*, pp. 216–225.
10. R. de Oliveira, T. Braun (24 Mar. 2004), "A Delay-based Approach Using Fuzzy Logic to Improve TCP Error Detection in Ad Hoc Networks", *In WCNC '04: Proceedings of the IEEE Wireless Communications and Networking Conference*, Volume 3, pp. 1666–1671.
11. R de Oliveira, T Braun, M Heissenbüttel (Mar. 2003), "An Edge-based Approach for Improving TCP in Wireless Mobile Ad Hoc Networks", *In DADS '03: Proceedings of the Conference on Design, Analysis and Simulation of Distributed Systems*, Orlando, USA.
12. BC Sreenivasa, GC Bhanu Prakash, KV Ramakrishnan (March 2011), "Survey on congestion control techniques in AD-HOC network", *Elixir Adoc.Net.*, Volume 32, pp.2061–2067.
13. Christian Lochert, Björn Scheuermann, Martin Mauve (June 2007), "A Survey on Congestion Control for Mobile Ad-Hoc Networks article", *Wiley Wireless Communications and Mobile Computing*, Volume 7, Issue 5, pp. 655–676.  
<http://www.interscience.wiley.com>.
14. S Biaz, NH Vaidya (October 1998), "Distinguishing congestion losses from wireless transmission losses", *IEEE 7th Int. Conf. on Computer Communications and Networks*.
15. Sachin Gajjar, Hari M Gupta (2008), "Improving performance of Ad-hoc TCP in Mobile Ad-hoc Network", *IEEE*, 987-1-4244-2746-8/08.
16. Miss Ashwini D Bhople, PA Tijare (June–July 2011), "An analysis of ADTCP, I-ADTCP and Cross-Layer Based Protocol for Improving Performance of TCP in Mobile Adhoc Network", *IJCSA*, Volume 4, Issue 2, pp. 56–70.

**Cite this article as:** Sreenivasa BC, & GC Bhanu Prakash. (2019). *Performance Analysis of Congestion Control Techniques ADTCP and Improved ADTCP for Improving TCP Performance over Ad-hoc Networks. Journal of Android and IOS Applications and Testing*, 4(2), 25–32.  
<http://doi.org/10.5281/zenodo.3358384>